

# CS0033 (2/3M1)

## Technical Datasheet



### Features


- Cable connection for powering military devices

### Applications

- Covert operations
- Homeland Security
- Surveillance

Technical Specifications	
Part No.	CS0033
NSN	6135-99-617-2805
Voltage Range	10.5 to 14.4V
Average Voltage	11 to 12V
Nominal Capacity	160Ah
Max. Discharge	5.0A continuous
Pulse Capability	N/A
Weight	6.7kg max.
Operating Temperature	-15°C to 55°C
Storage Temperature	-32°C to 70°C
Exterior/Housing	Moulded ABS case
Terminals/Connector	Amphenol 629B-56T-08-33-SN
Safety	Polyswitch Material Safety Datasheet - MSDS095 Safety Guide UBM-5135
Transportation	Class 9 - U.S. and International (see note)
Export License	ECCN 3A611.x export license required to export from U.S.
Harmonized Tariff Schedule	8506.50.0000
Note	A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.

## Dimensions

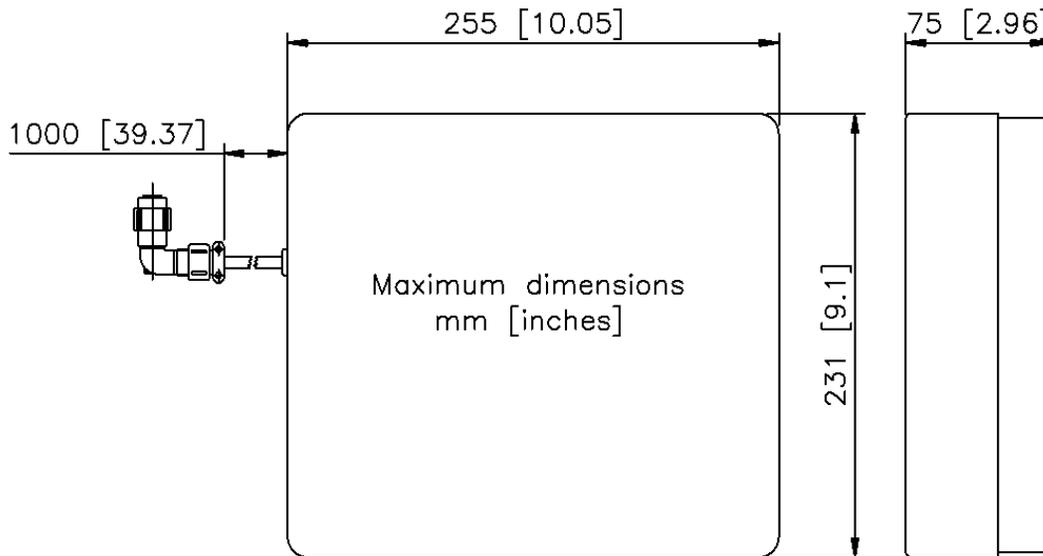

## Performance Graphs

