


# UI06H09002 BATTERY

## Technical Datasheet - Tentative

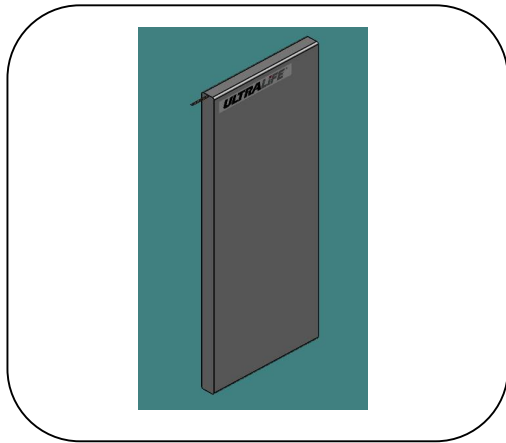

### Features

- High energy density.
- Built-in Protection Module
- Comprehensive charging/ discharging and passive safety systems.

### Application

- Suitable for use in Lighting System and Back-Up Systems

### Technical Specifications

Part No.	UI06H09002
Chemistry	Lithium Iron Phosphate (LiFePO4)

### Electrical Parameters

Nominal voltage	19.2 V
Nominal capacity	13.5 Ah
Max. charge current	10 A
Max. charge voltage	21.9 V
Cont. discharge	10 A
Peak discharge	10 A
Life expectancy @ 25°C 0.2C Charge/0.2C Discharge	>2000 cycles with min 80% of initial capacity
Energy	259.2 Wh

### Safety Parameters PCM

Over-charge detection voltage	3650mV/cell ± 0.025 Volts
Over-discharge detection voltage	2500mV/cell ± 0.063 Volts

Operating temperature	0°C to 45°C (charge)
	-20°C to 60°C (discharge)
Storage temperature	-20°C to 60°C max
	-20°C to 20°C recommended

### Physical Parameters

Length	465mm
Width	176mm
Height	22mm
Weight	3000 grms
Contacts Output	Flying Leads 2.5Sqmm 600mm
Enclosure	PVC Shrink Wrap

UI06H09002

Ultralife Batteries India Private Limited


No. 38B1 Part, Doddanakundi Industrial Area, 1st Phase, Mahadevapura, Bangalore 560 048

Phone : +91 80 28524680 , +91 80 28524690

16 October 18 UI06H94002 Rev:0

Page 1 of 2

# Dimensional Drawing

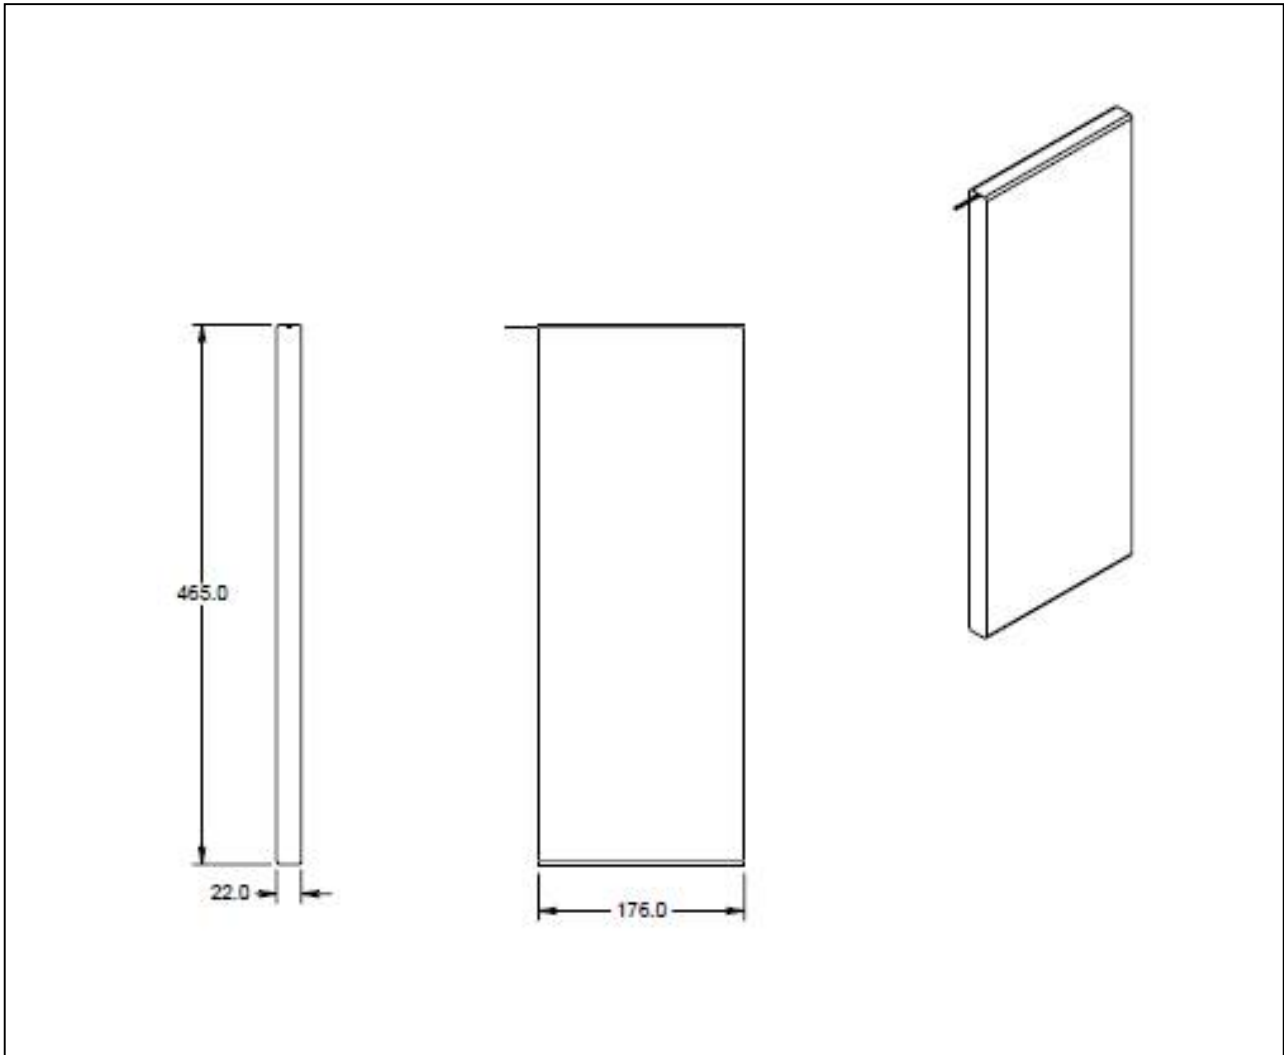

UI06H09002

Ultralife Batteries India Private Limited

No. 38B1 Part, Doddanakundi Industrial Area, 1st Phase, Mahadevapura, Bangalore 560 048

Phone : +91 80 28524680 , +91 80 28524690

16 October 18 UI06H94002 Rev:0

Page 2 of 2