

# ER34615: D-Size Bobbin Cell

## Technical Datasheet



Technical Specifications	
Part No.	ER34615 (UHE-ER34615)
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Thionyl Chloride
Voltage Range	2.0 to 3.7V
Nominal Voltage	3.6V
Nominal Capacity	19Ah @ 3mA to 2.0V @ 23°C
Max. Continuous Discharge Current	200mA
Max. Pulse Discharge Current	Up to 400mA (life and temperature dependent)
Weight	106g
Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C (max 30°C for a >5 years life)
Exterior/Housing	Stainless steel container
Terminals/Connector	Radial tabs / radial pins / axial leads / flying leads
Safety	AL-MSDS/RD-002 Material Safety Datasheet - MSDS041 Safety Guide UBM-5112
Transportation	Class 9 - A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.
Quality Assurance	Ultralife manufacturing facilities are ISO 9001:2008 and ISO 14001:2004 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.


### Features

- High and stable operating voltage
  - Higher power and higher energy for the whole battery life
- Superior drain capability
  - Higher power applications
- Low self-discharge rate (less than 1% after 1 year of storage at +20°C)
  - Battery life higher than 10 years, depending on the application
- Hermetic glass-to-metal sealing
  - Avoid leakage, key for a higher than 10 year battery life
- Non-flammable electrolyte
  - Safer operation in case of abuse


### Typical Applications

- Military and other radio applications
- Smart meters
- Alarm and security systems
- Beacons and emergency location transmitters
- GPS
- LED lighting applications


## Dimensions

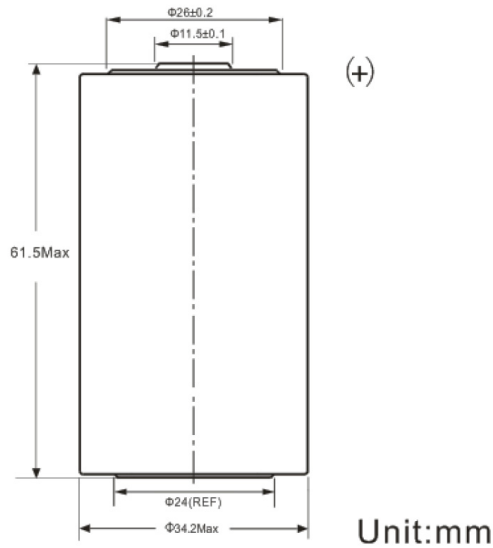

## Typical Performance Graphs

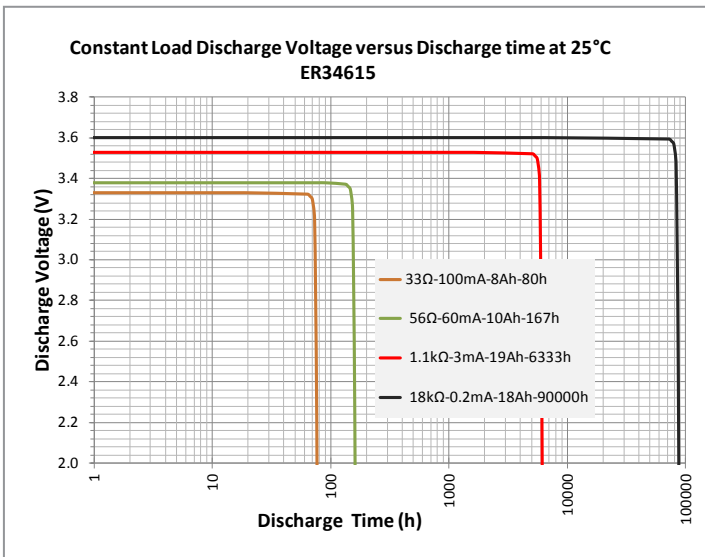

High and flat voltage at high and low drain

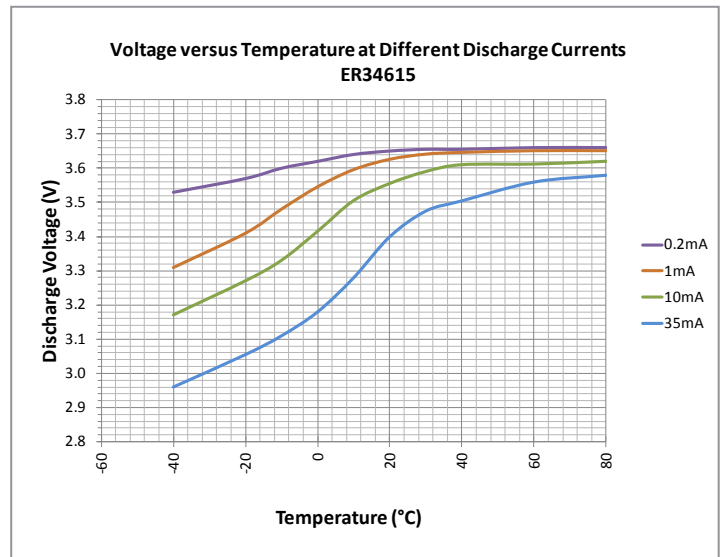

High voltage at high drain even at -30°C